

Radiata Pine Plywood from Chile

EAGON 



EAGON 

Eagon USA Corp.

Creating beautiful living

eric.sizemore@eagonusa.com

+1 (336) 706 3366

www.eagonusa.com


Sanded Plywood



TSCA
21-389



TIMBER PRODUCTS
Mill 283

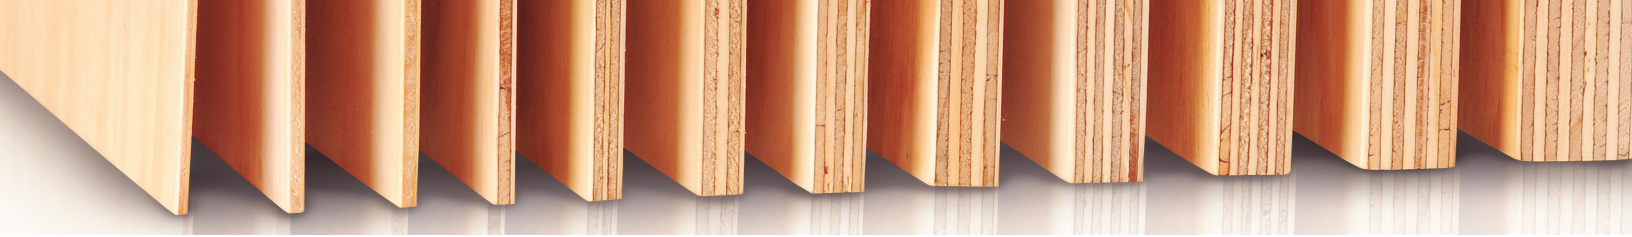

Sanded Plywood ACX,BCX,CpC

- Manufactured with 100% Radiata Pine plantation grown logs
- FSC® Certification Available
- Made with Phenolic Exterior Bioadhesive / WBP (Water Boiled Proof), exempt from CARB Regulations
- Highly resistant plywood, Timber Products Inspection stamped, meets requirements of PS 1-09 underlayment
- Extra smooth sanded finish, 150 grit face suitable for staining or painting
- **Sustainable**



Applications

- Table and Counter tops
- Underlayment
- Industrial applications
- Packaging
- Furniture
- Construction
- Lamination Base

Face veneer grade

A



B



Cp



General Properties

General Properties		Standard
Glue	Bioadhesive / WBP (Water Boiled Proof)	PS1
Formaldehyde Emission	< 0.020 [ppm]	ASTM E1333 - 14
Glue Quality	Outdoor environment	PS1
Available Grades	AC BB BC CpC	PS1

Technical Specification

Nominal Thickness [mm]	3.2	4.2	5.2	6	9	12	15	18	21	25	30
Nominal Thickness [in]	1/8	1/6	1/4	1/4	11/32	15/32	19/32	23/32	13/16	1/1	
N° of plies	3	3	3	3	3/5	5	5/7	7/9	7	9	11
Size: Length [ft] x Width [ft]	8 x 4										
Pieces per Bundle	270	230	170	160	108	80	65	54	47	39	33
Sheet Weight [lbs]	12	15	17	20	30	39	50	59	69	80	98
Bundle Weight [lbs]	3152	3174	3240	3152	3196	3152	3196	3196	3240	3108	3240
M3	2.572	2.798	2.941	2.858	2.893	2.858	2.902	2.893	2.938	2.902	2.947



Bending Strength
> 40 [N/mm²]



Tensile Strength
> 0.8 [N/mm²]



Moisture
8 - 12 %



Density
450 -550 [kg/m³]



Over 45 years of experience manufacturing plywood
Eagon industrial Co.,Ltd. Eagon USA Corp. Eagon Lautaro S.A.